



- **Type:** Single lens luminaire
- **Source:** 1000/1200 W Tungsten
- **Optics:** 200 mm Fresnel lens

## Reliable and easy to maintain

A large 200 mm lens gives unparalleled light output and quality of beam. The 310H is at home in every venue, large and small, and offers broad coverage with a smooth, even beam. Designed for easy maintenance, this unit has a well-earned reputation for reliability.

### Features

- **Theatre front cassette:** no light spill to distract audiences or performers
- **Accessories holder:** double runners to hold accessories and colour filters
- **Barn door:** unique rotating barn door with 4 individually rotating blades – makes even the most difficult angle possible
- **Focus adjustment:** smooth focus adjustment from rear, even when lantern is hot, for a longer lamp life
- **Tilt reference on hanging yoke:** index for rapid re-positioning

### Optical

- **Multiposition socket:** accepts 1000 W and 1200 W lamps
- **Unique 200 mm (8 in) lens:** no equivalent on the market in terms of light output and beam quality

### Construction

- **Made in France :** fully manufactured in Robert Juliat premises retaining complete control over all aspects of quality
- **Air vents:** efficient cooling with no light spill
- **Bodywork:** strong sheet metal construction for durability
- **Moving parts:** smooth at all times, even when hot
- **Captive knobs and handles:** additional security when working at height or in transit
- **Access:** easy access to lamp house and lenses through front opening for fast and efficient maintenance
- **Easy access to all parts:** easy cleaning, re-lamping and maintenance
- **Safety grid:** earthed safety grid fitted as standard
- **Safety first:** front accessories safety cable attachment point

Picture:310H

DSEN005\_310HF - 27/01/2026

Robert Juliat reserves the right to change or alter any of the items detailed on this page, to increase or improve manufacturing techniques without prior notice.

**Robert Juliat S.A.S., 32 rue de Beaumont, 60530 Fresnoy-en-Thelle - France**  
Telephone : +33 (0)3 44 26 51 89 - [info@robertjuliat.fr](mailto:info@robertjuliat.fr) - [www.robertjuliat.com](http://www.robertjuliat.com)

## Source



- Lamp type: Tungsten
- Socket: Gx9.5

Admissible lamps	Power *	Lumen output*	Colour temperature*	Life*
LIF: T19 (T11) - ANSI: FWP/FWR	1 000 W	21 000 lm	3050K	750 h
LIF: CP70 - ANSI: FVA/FVB	1 000 W	26 000 lm	3200K	200 h
LIF: T29 - ANSI: FWS/FWT	1 200 W	29 000 lm	3050K	400 h
LIF: CP90	1 200 W	30 000 lm	3200K	200 h

(\*) manufacturer's data

## Optics

### Characteristics

- Type: Single lens
- Range: 6° to 46° (Beam angle)
- Lens: 200 mm Fresnel lens


### Gel filter

- Shape: Square
- Standard size: 215x215 mm (8.5x8.5 in)

## Photometrics


optics: 6°-46° / Standard / LIF: CP90 1200W

### • Optics @ 6°

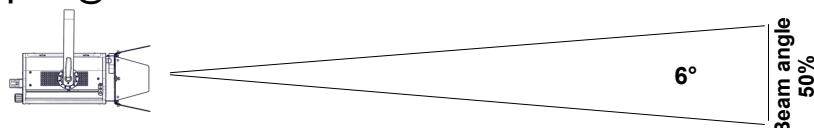


<b>Distance</b>	3 m	5 m	7 m	10 m	12 m	15 m
<b>Diameter</b>	0.3 m	0.5 m	0.7 m	1 m	1.3 m	1.6 m
<b>Illumination</b>	24 500 lux	8 900 lux	4 500 lux	2 250 lux	1 550 lux	980 lux
<b>Distance</b>	10 ft	15 ft	25 ft	35 ft	40 ft	50 ft
<b>Diameter</b>	1 ft	1.6 ft	2.6 ft	3.7 ft	4.2 ft	5.2 ft
<b>Illumination</b>	2 250 fc	980 fc	360 fc	180 fc	140 fc	90 fc

### • Optics @ 46°

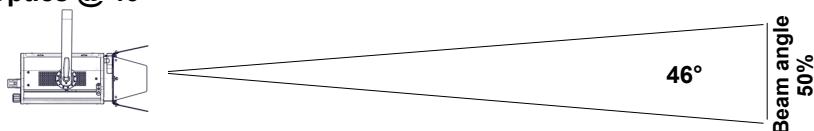

<b>Distance</b>	3 m	5 m	7 m	10 m	12 m	15 m
<b>Diameter</b>	2.5 m	4.2 m	5.9 m	8.5 m	10.2 m	12.7 m
<b>Illumination</b>	2 800 lux	1 010 lux	520 lux	260 lux	180 lux	120 lux
<b>Distance</b>	10 ft	15 ft	25 ft	35 ft	40 ft	50 ft
<b>Diameter</b>	8.5 ft	12.7 ft	21.2 ft	29.7 ft	34 ft	42.4 ft
<b>Illumination</b>	260 fc	120 fc	41 fc	21 fc	16 fc	11 fc

## Dimensions and weight

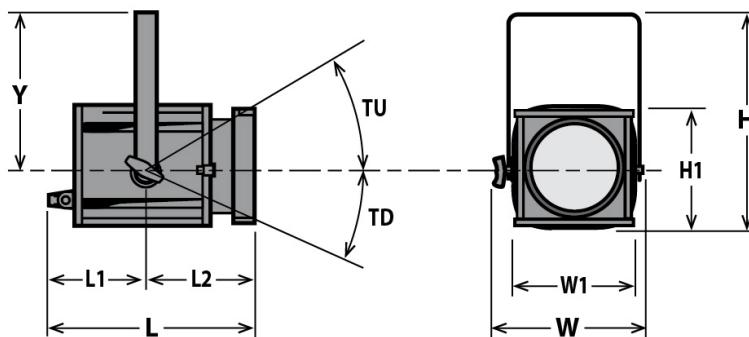

Weight: 7.7 kg (16.9 lbs)


Height	Length	Width	Yoke	Tilt
H= 440 mm (17.3 in) H1= 250 mm (9.8 in) L2= 205 mm (8.1 in)	L= 465 mm (18.3 in) L1= 260 mm (10.2 in)	W= 350 mm (13.8 in) W1= 250 mm (9.8 in)	Y= 315 mm (12.4 in)	TU= TBD° TD= 90°

## Shipping

- Weight : 9.2 kg (20.2 lbs)
- Volume : .06 m<sup>3</sup> (2.26 ft<sup>3</sup>)

## Installation

- Minimum distance to illuminated surface: 1.1 m ( 3.6 ft )
- Operating position:



## Construction

- Housing: Steel sheet - Aluminium
- Colour: Black
- Cooling: Convection cooling
- Maximum ambient temperature (Ta): 40°C (104°F)
- Maximum case temperature (Tc): 200°C (392°F)
- Total heat dissipation: 3 413 BTU/h
- Ingress Protection (IP) rating: IP20

## Electrical compatibility

- 230/240 V - 50 Hz
- 115/120 V - 60 Hz

## Warranty

- **Fixture: 2 years**  
See General Sales Condition on website

## Approvals



## Power input



- Type: attached power cord
- Cable: H07RNF 3G1.5
- Length: 3 m (9.8 ft)
- Power connector: CEE 7/7 (2P+E NF/Schuko)

## Power consumption

Voltage	Frequency	Current	Power
230 V	50 Hz	5 A	1000 W
230 V	50 Hz	6 A	1200 W

**Model**

<b>310HF</b>	1000/1200 W Tungsten Single lens luminaire - Gx9.5 socket - 200mm Fresnel - 310HF
--------------	---

**Options**

<b>PCP1716A</b>	16A blue 2P+E 6h IEC60309 power connector	
-----------------	---	---

**Accessories**

<b>PF1000M2</b>	215x215mm metal filter holder <b>1 included</b>	
<b>G1000</b>	215x215mm safety grid <b>1 included</b>	
<b>CP70</b>	CP70 - Gx9.5 1000W 230V 200h 3200K lamp	
<b>T19 (T11)</b>	T19 (T11) - Gx9.5 1000W 230V 750h 3050K lamp	
<b>CP90</b>	CP90 - Gx9.5 1200W 230V 200h 3200K lamp	
<b>CF1000</b>	4 rotating leaves on a rotating barndoors - 215x215mm ( without safety cable) - Weight: 1.03 Kg	
<b>876</b>	Hook clamp 40x10mm with 28mm M10 screw for Ø35 to 50mm pipes - SWL: 50Kg - Weight: 1.25 Kg	
<b>880</b>	Hook clamp 40x10mm with 28mm M10 screw for Ø50 to 63mm pipes - SWL: 50Kg - Weight: 1.36 Kg	
<b>CS2</b>	Safety cable Ø3 mm L= 600mm - SWL: 75 Kg	
<b>CS5</b>	Safety cable Ø1,5 mm L=300mm for front accessory with karabiner and quick link - SWL: 25 Kg	